
INVICTUS EVO

| Frame | Ø30 mm tubular frame made of high-strenght steel |
|---------------|--|
| Bodyworks | 506 new model top line model with CIK-FIA homologated supports |
| Brakes | Hydraulic system, pump with oil recovery tank, iron cast brake disc. |
| Steering | Top line steering system with Ø330 mm "M5" steering wheel |
| Wheels | Magnesium Ø5 inches, 132 mm (front) – 212 mm (rear) |
| Tank Capacity | 8.5 litre |
| Seat | "Racing", sizes: XS 1 1+ 2 3 4 |
| Axle | Ø50x2x1030 mm S MS MR M RGF MH H EH X |
| Spindles | Ø25 mm with Ø10 kingpins and Camber – Caster regulation system |
| Weight | STR configuration – 54 Kg RBS configuration – 50 Kg |

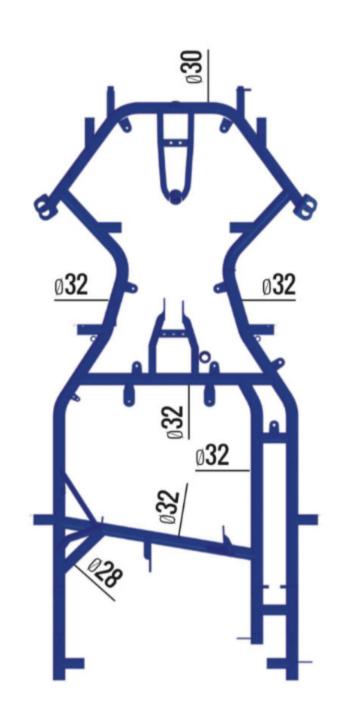

Wheelbase

XS1 1050 mm DD2 1055 mm

Categories

KZ1/KZ2 OKJ / OK ROTAX ROTAX MAX DD2

XS1 model is available in RBS and STR configurations